

Product sheet

MolokDomino[®] Light 2m³

ORIGINAL
MOLOK[®]

Suitability

2m³ MolokDomino Light is suitable for collecting mixed waste, plastic, glass, metal etc. When divided, also for organic waste. The container can be divided in to two parts with lifting bags or three parts with lifting containers; BinSystem 500 D Top.

Dimensions and materials

Volume	2 m ³
Height	1200 mm, surface container
Diameter	1600 x 1600 mm
Well body material	HD Polyethylene
Lid and filling lid	HD Polyethylene
Lifting bag	Polypropylene
Reinforced Lifting bag	Polypropylene + PVC
Lifting container	HD Polyethylene

Rotation molded well body is completely water proof. Filling hole situates about 1,1 m above ground level. Lifting bag is made of strong woven polypropylene. Safe Working Load (SWL) is indicated in the lifting bag/lifting container. There is an aluminium lifting ring on the top of the lifting bag. Quick system or four lifting loops are attached to the lifting ring. The closing mechanism is situated at the bottom of the lifting bag. The SWL of 2m³ lifting bag is 1250 kg. BinSystem 500 D Top lifting container can be used in collecting of smaller fractions.


Accessories

- Quick system (standard)
- Hinge for Quick system 1/1
- Lifting bag (standard) 1/1, 1/2, 2/3
- Reinforced lifting bag 1/1, 1/2, 2/3
- BinSystem 500 D Top lifting container 1/3
- BinSystem 2250 D Top
- Support catch for the filling lid
- Locking for filling lid

Framing options

- Composite board (6 shades)
- Aluminium (natural)
- Painted aluminium (RAL tones, standard RAL7024)
- Print framing

Dividing the wells

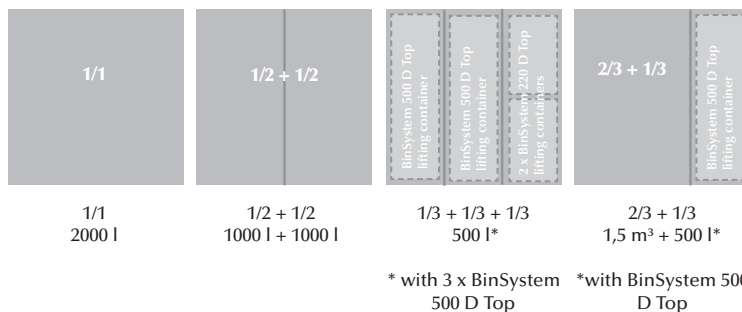


Lid alternatives

- Standard lid 1/1, 1/2, 1/3
- Standard lid with filling slot 1/1

Standards

Molok[®]-Deep Collection System complies with the requirements of EN13071-standard. Molok[®]-lifting bags are tested according to ISO 21898-standard.

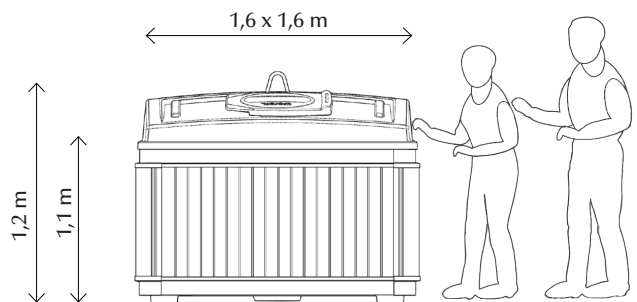

DEEP COLLECTION[®]